



TECHNICAL BULLETIN

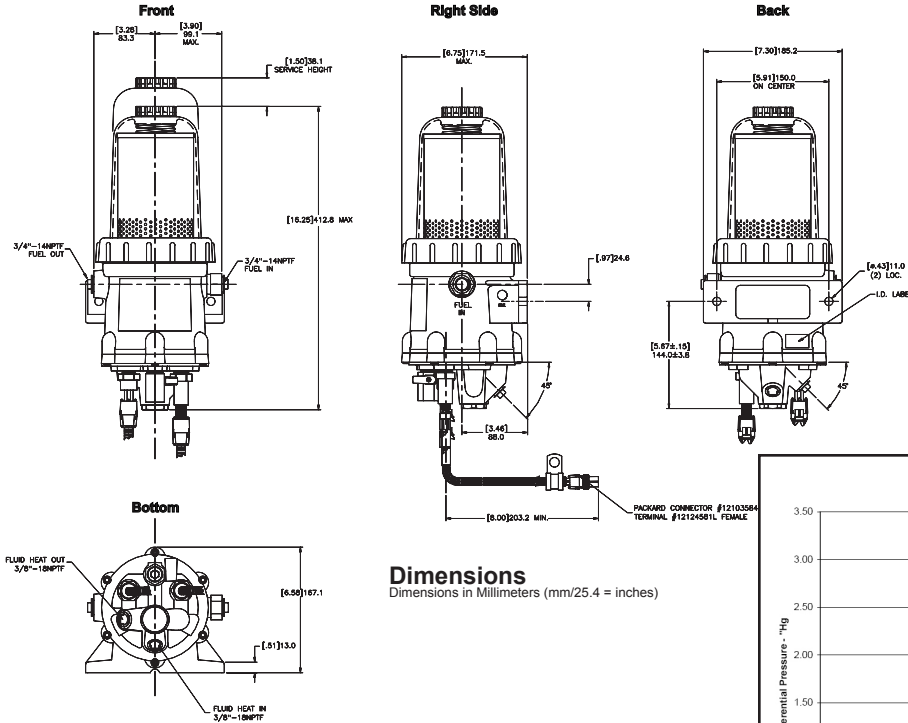

Dimensions
 Dimensions in Millimeters (mm/25.4 = inches)

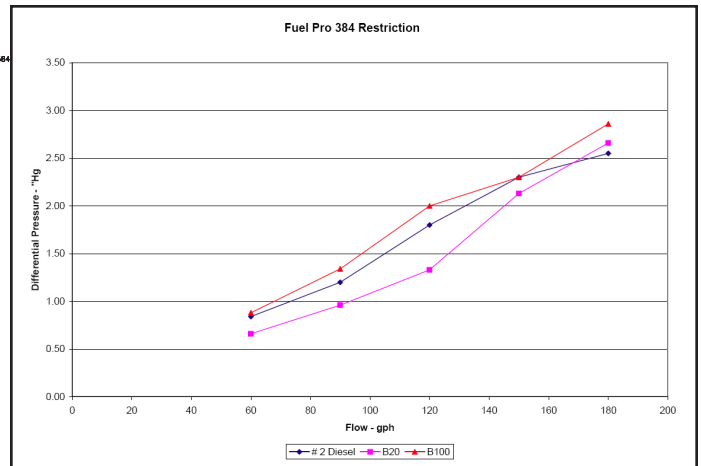

Fuel Criteria

- Recommended for blends above B20
- Fuel must meet ASTM D6751 standards

Notice Regarding Biodiesel

- Consult your engine manufacturer for information regarding their position on allowable biodiesel blends.
- Use of this product for biodiesel blends exceeding B20 or 100% vegetable oil may not meet emulsified water separation and cold weather operation requirements.

Specifications

Linear Dimensions in Millimeters (mm/25.4=inches)

Height Overall _____ 412.8 mm (16.25 in)
 Depth Overall _____ 167.1 mm (6.58 in)
 Width, max. _____ 185.2 mm (7.3 in)
 Mount Bracket Centers _____ 150 mm (5.91 in)
 Weight, dry _____ 9.75 lbs
 Fuel In Connection _____ 3/4"-14 NPTF
 Fuel Out Connection _____ 3/4"-14 NPTF
 Fuel Capacity w/filter _____ 64.2 oz
 Water Trap Capacity _____ 33.8 oz
 Filter Service Clearance _____ Min 38 mm (1.5")
 Max Fuel Flow _____ 180 gph
 Electric Pre-heater (12 V) _____ 12 VDC, 250 W, 60°F, 18 A
 Electric Pre-heater (120 V) _____ 120 VAC, 75 W, .65 A
 Fluid Heater Connection _____ 3/8"-18 NPTF
 Emergency spin on filter stud _____ 1"-14
 (Use Fleetguard FF105 filter)